

MOWERS

REEL MOWERS

FLOATING HEAD FAIRWAY
& FIXED HEAD STANDARD

Setting New Standards Worldwide
Turf Industry Leaders in Service and Innovation



GET A REEL MOWER & MOW MORE ACRES PER DAY!

Fixed Head Standard Reel



Features:


- Delivers quality cut consistently from 1/2" to 3 1/4"
- Available in 5, 6, 7, 8 and 9 bladed reels
- Rugged tubular frame design and high flotation for soft conditions
- Delivers great cut even in wet or rainy conditions
- Follows field contours
- Easy reel and mowing height adjustment
- Easy to operate and maintain & transport
- Advanced reel design with single point adjustment
- The floating head follows ground contours for low mowing heights



KESMAC INC.
 TEL: 905-476-6222 • 1-888-341-5113 FAX: 905-476-6744
 US Parts TEL: 1-800-314-1008
 23324 Woodbine Avenue, Keswick, Ontario L4P 3E9
 email: info@kesmac.com • www.brouwerturf.com



Floating Head Fairway Reel

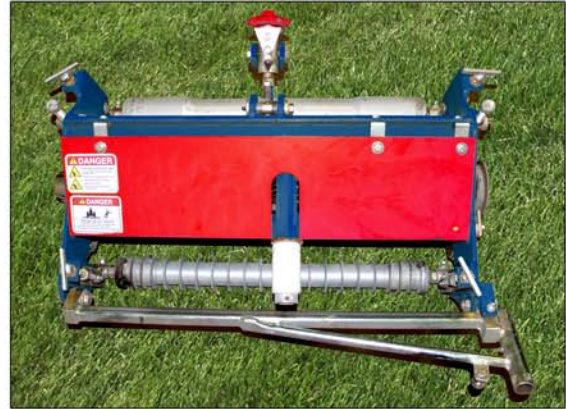

Benefits:

- Scissor-like cut is better for your turf
- Light weight, less compaction
- Mows up to 160 acres per day, 11 Gang or 130 acres per day, 9 Gang
- Low horsepower required
- Promotes healthy grass and faster maturity

SPECIFICATIONS								
GANG	5 GANG		7 GANG		9 GANG		11 GANG	
WIDTH OF CUT	11' - 6"	3505 mm	16' - 0"	4877 mm	20' - 6"	6250 mm	25' - 0"	7620 mm
HEIGHT OF CUT	1/2"-3 1/4"	13-83 mm	1/2"-3 1/4"	13-83 mm	1/2"-3 1/4"	13-83 mm	1/2"-3 1/4"	13-83 mm
WEIGHT FIXED HEAD STANDARD	1847 lbs.	0843 Kg.	2860 lbs.	1297 Kg.	3120 lbs.	1415 Kg.	3778 lbs.	1714 Kg.
WEIGHT FLOATING HD. FAIRWAY	1972 lbs.	0895 Kg.	3035 lbs.	1377 Kg.	3345 lbs.	1518 Kg.	4710 lbs.	2136 Kg.
TRANSPORT HEIGHT	50"	1270 mm	79"	2005 mm	82"	2083 mm	106"	2692 mm
TRANSPORT WIDTH	95"	2415 mm	110"	2795 mm	112"	2845 mm	112"	2845 mm
LENGTH WITHOUT TONGUE	85"	2160 mm	85"	2160 mm	85"	2160 mm	85"	2160 mm
LENGTH WITH TONGUE	136"	3455 mm	136"	3455 mm	136"	3455 mm	136"	3455 mm
TIRES - MAIN FRAME	24 x 12.00 - 12		24 x 12.00 - 12		24 x 12.00 - 12		23 x 10.50 - 12 CASTER 15#000e	
TIRES - WING FRAME	18 x 8.5 - 8		18 x 8.5 - 8		18 x 8.5 - 8		18 x 8.5 - 8	
DRIVE	PTO & V BELTS		PTO & V BELTS		PTO & V BELTS		PTO & V BELTS	
CUTTING REELS	7.88" DIA. x 30" 200 mm DIA. x 762 mm		7.88" DIA. x 30" 200 mm DIA. x 762 mm		7.88" DIA. x 30" 200 mm DIA. x 762 mm		7.88" DIA. x 30" 200 mm DIA. x 762 mm	



Specifications subject to change without notice or obligation.
 Printed in Canada 02/17